



## LandingZone Firmware Upgrade Procedure

1. The firmware upgrade must be done while running Windows OS.
2. You need an USB cable (one side USB Type C female connector connected to the LZ dock left side Type C port closest to you, and the other side USB Type C or Type A male connector to a Windows PC).
3. Copy file “Ortek\_LZ60\_20240814\_VL103\_VL817-B0x2\_P1BC\_Fix M3-PD.exe” to Windows System.
4. Run “Ortek\_LZ60\_20240814\_VL103\_VL817-B0x2\_P1BC\_Fix M3-PD.exe”
  - a. You will see this pop-up:

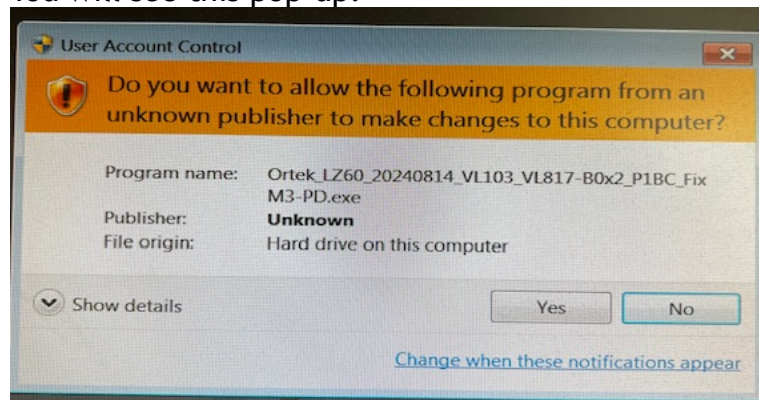


Click “Yes”

- b. Select “Create a desktop shortcut”:

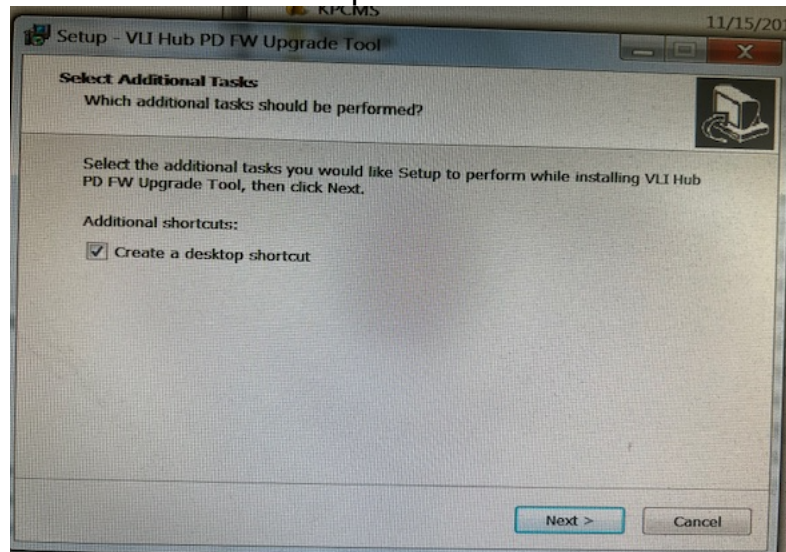


Click “Next”

C.

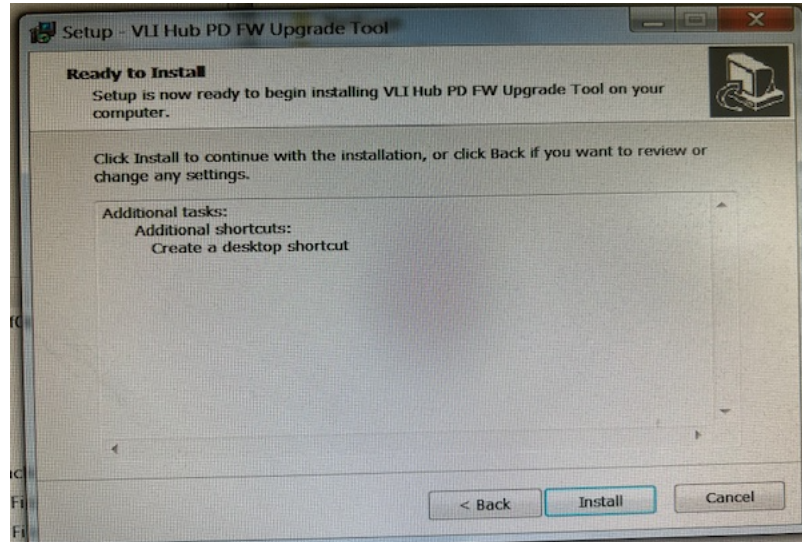

Click "Install"

d.

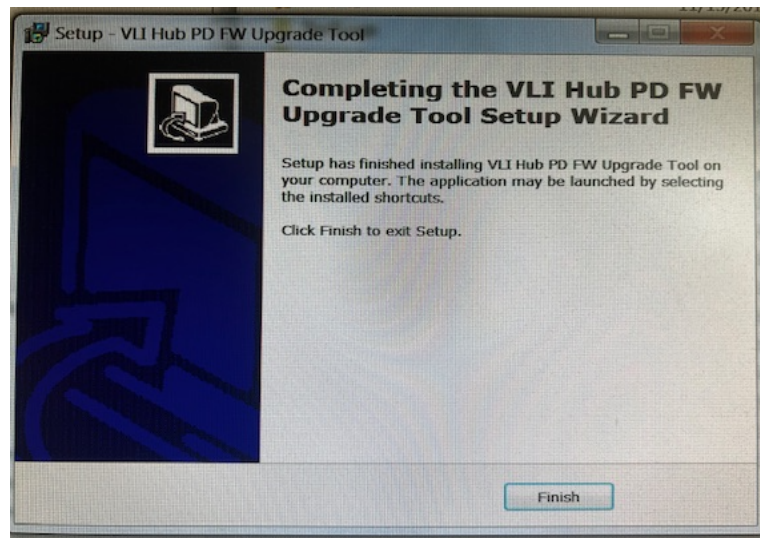

Click "Finish"


5. Connect an USB cable (one side USB Type C female connector to LZ dock left side Type C port closest to you and the other side USB Type C or Type A male connector to a Windows PC)



6. Double click “Upgrade FW program” icon




a. There will be a pop-up:

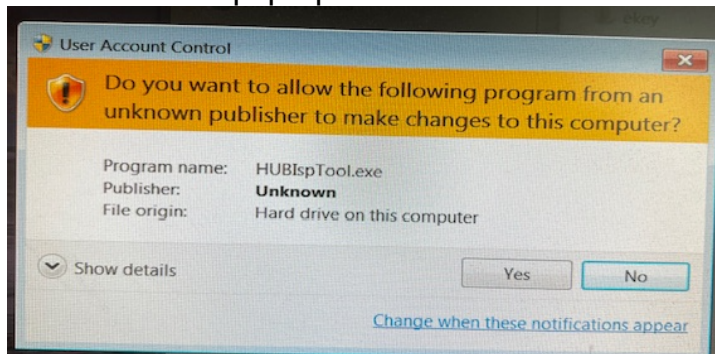


Click “Yes”

b. There will be a pop-up:

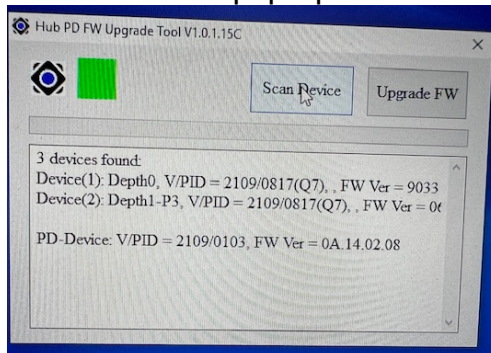


Click “Scan Device” - If it shows “FW Ver=0A.14.01.08” or “FW Ver=0A.14.02.08”, the firmware needs to be upgraded.

- c. Click “Upgrade FW”
- i. During the upgrade cycle, the green square will change to a yellow square:

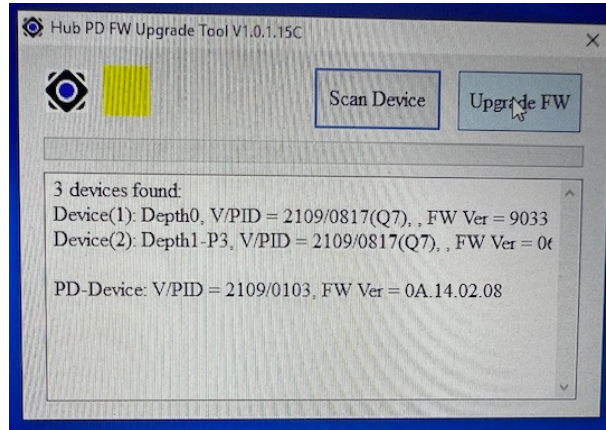

- ii. After 10 ~ 30 seconds, it'll show “Upgrade is completed”, the yellow square will become a green square:

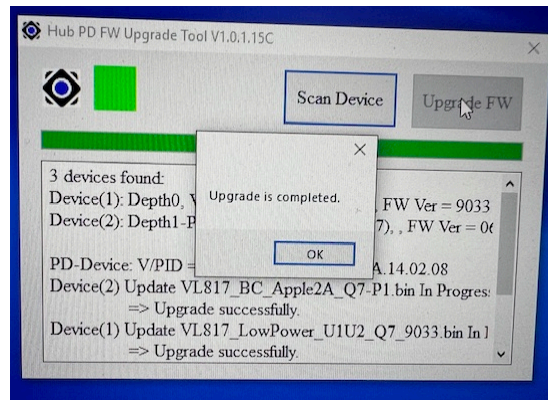

Click “OK”

- d. Click “Scan Device” again - It should show “FW Ver=0A.14.04.08”. That means the firmware upgrade was successful.

