

# OWNER'S MANUAL



For additional languages, please visit [LandingZone.net/languages](http://LandingZone.net/languages)



**DOCK. LOCK. CONNECT.**

Dear MacBook Air® Owner,

Thank you for your purchase of the LandingZone PRO. We hope it provides you with great satisfaction. The LandingZone is quite easy to use but, should you need some help with it, this manual is designed to easily walk you through how to use it.

If you have any questions or need support, please feel free to contact us anytime at [landingzone.net](http://landingzone.net) or by calling 888-872-3251.

Sincerely,  
Kitae Kwon  
CEO, infiniWing, Inc.

## MODEL NUMBERS

LZ2011A for MacBook Air® 11-inch

LZ2013A for MacBook Air® 13-inch

## COMPATIBILITY

This device works with:

11-inch MacBook Air® models released on June 2012 (Model A1465)

13-inch MacBook Air® models released on June 2012 (Model A1466)

Supports Apple Thunderbolt® Display (model A1407) and other non-Thunderbolt® monitors

## WHAT'S IN THE BOX?

- LandingZone PRO Secure Docking Station
- Power Adapter
- Lever Lock Travel Clip
- Manual
- Warranty Card
- Registration Reminder Card

## BENEFITS

LandingZone PRO is an attractive and simple to use secure docking station for the MacBook Air®. You can return from traveling with your computer and simply snap it into the LandingZone on your desk and enjoy the benefits of a complete desktop workstation.

## FEATURES

- Single-step docking
- Built-in USB Hub with 3 USB 3.0 ports
- Gigabit Ethernet port
- Supports Apple Thunderbolt® Display (model A1407) and other non-Thunderbolt® monitor
- Built-in security port compatible with all the Kensington® Laptop Locks (sold separately) to secure your MacBook Air®
- Power adapter with wide range of input voltage (100~240 VAC)
- 1 additional USB 3.0 pass-through port to support high-speed charging of iPhone, iPad and iPod on the left side
- White on/off status LED on the right wing
- Lever Lock Travel Clip for travel

## BEFORE YOU BEGIN

**Travel Clip:** Remove the Travel Clip (1) on the Opening Lever (9). When transporting your LandingZone PRO, you can use the Travel Clip to secure the Opening lever.


**Ethernet functionality:** Go to [landingzone.net/download](http://landingzone.net/download) to download and install the latest Ethernet driver for full Ethernet compatibility.



# DOCKING

## STEP 1: CONNECT POWER & PERIPHERALS


- Make sure the Tightening Switch **(5)** is in the UP position and insert the MacBook Air's MagSafe 2 power plug into the MagSafe 2 Power Plug Holder **(6)**. Push the Tightening Switch **(5)** down.
- Connect Ethernet & peripherals such as monitor, keyboard, storage devices, drawing tablet, etc. (Note: you must install the Ethernet driver first to use Ethernet).
- Optionally, connect a Kensington® Lock (not included), following instructions with the lock **(8)**.

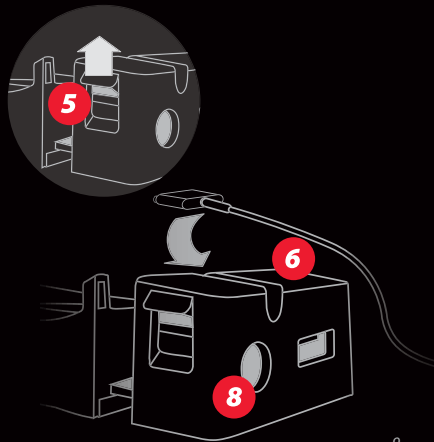

## STEP 2: CONNECTING YOUR MACBOOK AIR®

- Place your closed MacBook Air® into LandingZone Pro until the back of your MacBook Air® touches the two guide posts **(A)**.
- Push both ends **(B)** of the LandingZone Pro gently inward to fully engage with the MacBook Air®. **Do not use the lever on the LandingZone PRO when you dock the computer.**

*Tip: If you have Apple Thunderbolt® Display (model A1407), you can connect additional Thunderbolt® peripherals using the display's Thunderbolt® port.*

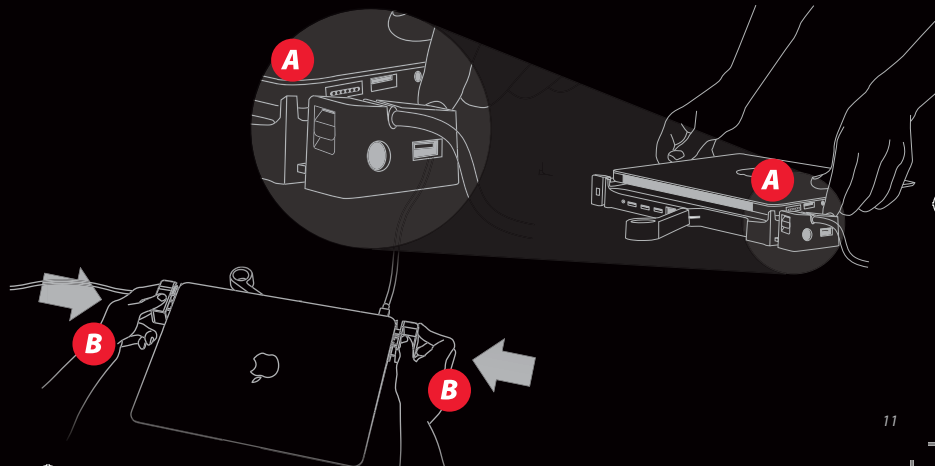

# UNDOCKING

## STEP 1:

Eject devices in the OS X Finder


## STEP 2:

Unlock if using a lock

## STEP 3:

Open the lever (9) and lift out your MacBook Air®

*If you would like to release the MagSafe 2 plug, flip the Tightening Switch up (5)*

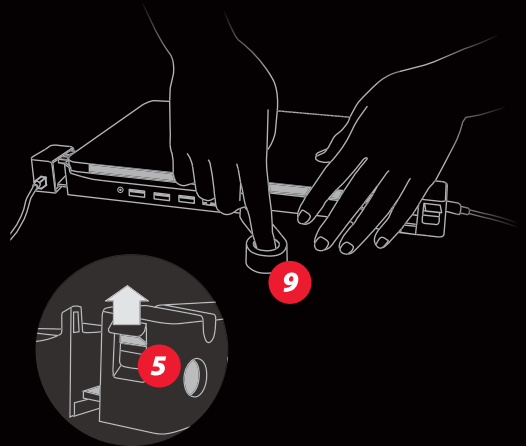

# TROUBLESHOOTING

## **USB DEVICES ARE NOT WORKING**

Make sure that both sides of the LandingZone PRO are completely closed and the connectors are fully inserted into the MacBook Air®. Confirm that the power adapter is properly plugged into your wall outlet and connected to the LandingZone PRO (the On/Off Status Indicator light should glow).

## **MACBOOK AIR® IS NOT CHARGING**

Confirm that you properly inserted the MacBook Air's MagSafe 2 power adapter into the LandingZone (6).

## **ETHERNET IS NOT WORKING**

Double-check that you have the proper Ethernet driver installed.

## **WINGS DON'T CLOSE PROPERLY**

Make sure that you push the MacBook Air® all the way back to the two guide posts and that the MagSafe 2 Tightening Switch (5) is in the DOWN position. Before carefully pushing the sides together, align the connectors so that they fit into the MacBook Air's ports.

## **IPHONE/IPAD/IPOD CHARGES SLOWLY**

Use the USB port on the left side for high-speed charging.



# CUSTOMER SUPPORT

## **ONLINE SUPPORT**

Go to [landingzone.net/support](http://landingzone.net/support)

## **PHONE SUPPORT**

Call 888-872-3251 (Monday - Friday, 9:00 a.m - 5:00 pm Pacific Time)

## **EMAIL SUPPORT**


Send email to [support@landingzone.net](mailto:support@landingzone.net)

## **ETHERNET DRIVER DOWNLOAD**

Download at [landingzone.net/download](http://landingzone.net/download)

## PROPER OPERATING ENVIRONMENT

- Line voltage: 100-240V AC
- Frequency: 50Hz to 60Hz
- Operating temperature: 50° to 95° F (10° to 35° C)
- Storage temperature: -13° to 113° F (-24° to 45° C)
- Relative humidity: 0% to 90% noncondensing
- Maximum operating altitude: 10,000 feet
- Maximum storage altitude: 15,000 feet
- Maximum shipping altitude: 35,000 feet

 This device complies with part 15 of the FCC Rules.



## CARE & CLEANING

Clean with a soft cloth. Do not use water or cleaning solutions to clean LandingZone.

When travelling, use the supplied Travel Clip to keep the lever closed

## DISPOSAL

Applicable laws may limit how you can dispose of this product. Accordingly, please make sure you follow your local, state, federal, and country ordinances, laws, regulations, or other guidelines to properly dispose of this product and the accompanying packaging materials.

## COPYRIGHT & TRADEMARK INFORMATION

© 2012 InfiniWing, Inc.

LandingZone is a registered trademark of InfiniWing, Inc.

Apple, the Apple logo, MacBook Air®, Mac OS X, Snow Leopard, Lion, and Mountain Lion are trademarks of Apple, Inc., registered in the U.S. and other countries.

Kensington is a registered trademark by Kensington Computer Group, a division of ACCO Brands.

All other company and product names mentioned may be trademarks of their respective companies. Mention of third-party products is for informational purposes only and does not constitute an endorsement or recommendation. InfiniWing assumes no responsibility with regard to the performance of products mentioned.



For additional languages, visit [LandingZone.net/languages](https://LandingZone.net/languages)