


# OWNER'S MANUAL

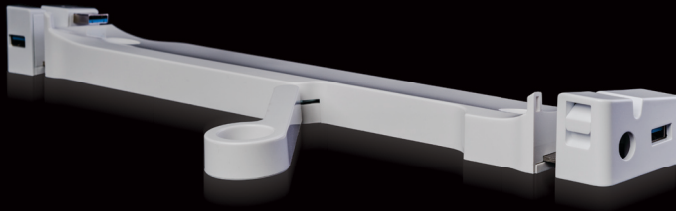

For additional languages, please visit [LandingZone.net/languages](http://LandingZone.net/languages)

The left half of the page has a solid red background. Overlaid on this background are two concentric circles. The inner circle is a darker shade of red, and the outer circle is a lighter shade of red. The text 'DOCK. LOCK. CONNECT.' is centered horizontally and partially overlaps the circles.

**DOCK. LOCK. CONNECT.**

Dear MacBook Air® Owner,

Thank you for your purchase of the LandingZone LITE. We hope it provides you with great satisfaction. The LandingZone is quite easy to use but, should you need some help with it, this manual is designed to easily walk you through how to use it.

If you have any questions or need support, please feel free to contact us anytime at [landingzone.net](http://landingzone.net) or by calling 888-872-3251

Sincerely,  
Kitae Kwon  
CEO, infiniWing, Inc.

## MODEL NUMBERS

LZ2011AL for MacBook Air® 11-inch  
LZ2013AL for MacBook Air® 13 inch

## COMPATIBILITY

This device works with:

13-inch MacBook Air® models released mid-2012  
(Model A1466)

11-inch MacBook Air® models released mid-2012  
(Model A1465)

## WHAT'S IN THE BOX?

- LandingZone Secure Docking Station
- Lever Lock Travel Clip
- Manual
- Warranty Card
- Registration Reminder Card

## BENEFITS


LandingZone is an attractive and simple to use secure docking station for the MacBook Air®. You can return from traveling with your computer and simply snap it into the LandingZone on your desk and enjoy the benefits of a complete desktop workstation.

## FEATURES

- Single-step docking with easy-to-use pass-through connectivity for Apple Thunderbolt® display or other displays.
- Built-in security port compatible with all the Kensington® Laptop Locks (sold separately) to secure your MacBook Air®
- Built-in USB with 2 USB 3.0 ports
- Supports high-speed charging of iPhone, iPad, or iPod
- MagSafe 2 power holder
- White on/off status LED on the right wing
- Lever Lock Travel Clip for travel

## BEFORE YOU BEGIN


**Travel Clip:** Remove the Travel Clip (1) on the Opening Lever (8). When transporting your LandingZone LITE, you can use the Travel Clip to secure the Opening Lever.

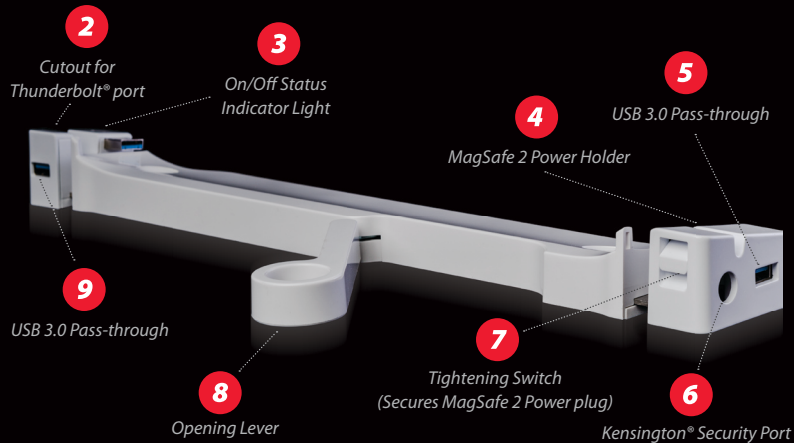

# DOCKING

## STEP 1: SETUP & PREPARATION


- Position the Tightening Switch **(7)** in the UP position and insert the MacBook Air's MagSafe 2 plug into the MagSafe 2 Power Holder **(4)**, and push the Tightening Switch **(7)** to the DOWN position to secure MagSafe 2 plug
- Connect USB peripherals such as monitor, keyboard, storage devices, drawing tablet, etc.

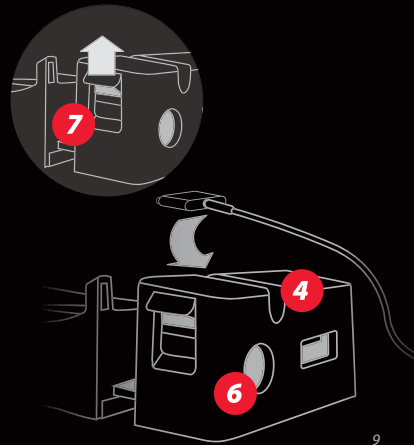

## STEP 2: CONNECTING YOUR MACBOOK AIR®

- Place your closed MacBook Air® into LandingZone LITE until the back of your MacBook Air® touches the two guide posts **(A)**
- Push both ends **(B)** of the LandingZone LITE gently inward to fully engage with the MacBook Air®. **Do not use the Lever on the LandingZone LITE when you dock the computer**
- Insert the Mini DisplayPort or Thunderbolt® connector into the MacBook Air's port through the cutout for the Thunderbolt® port
- Optionally, connect a Kensington® Lock (not included), following the instructions that are included with the lock **(6)**

**Tip:** If your display supports Thunderbolt® connectivity, you can connect additional peripherals using the display's Thunderbolt® ports

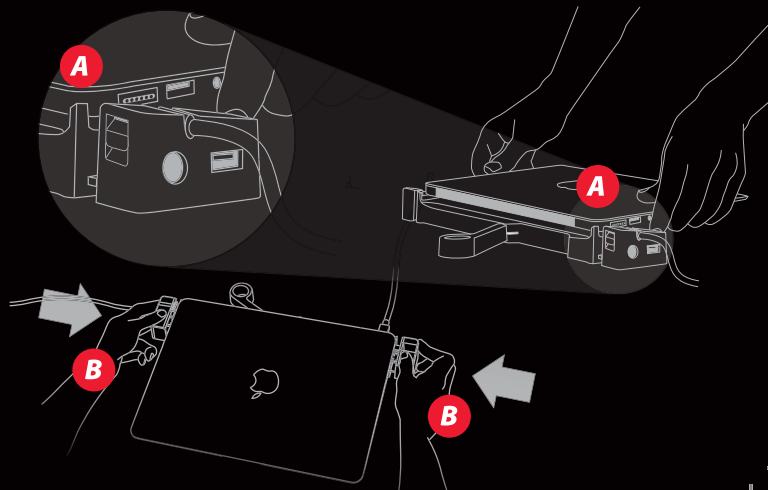

# UNDOCKING

## STEP 1:

Eject devices in the OS


## STEP 2:

Unlock if using a lock

## STEP 3:

Open the Lever **(8)** and lift out your MacBook Air®

*If you would like to release the MagSafe 2 plug, flip the Tightening Switch up **(7)***

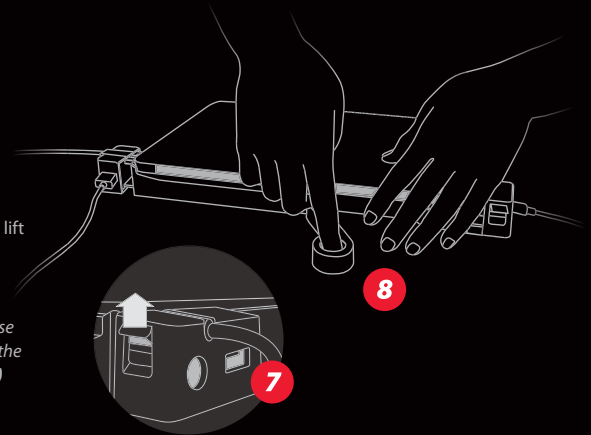

# TROUBLESHOOTING

## **USB DEVICES ARE NOT WORKING**

Make sure that both sides of the LandingZone are completely closed and the connectors are fully inserted into the MacBook Air®.

## **MACBOOK AIR® IS NOT CHARGING**

Confirm that you properly inserted the MacBook Air's MagSafe 2 power adapter into the LandingZone MagSafe 2 power holder **(4)** and that the switch **(7)** is pushed down.

## **WINGS DON'T CLOSE PROPERLY**

The MagSafe 2 power plug has to be inserted through the LandingZone's MagSafe 2 power holder **(4)** BEFORE closing the wings. Also the Tightening Switch **(7)** has to be in the DOWN

position before closing the wings. Make sure that you push the MacBook Air® all the way back to the two guide posts. Before carefully pushing the sides together, align the connectors so that they fit into the MacBook Air's ports.

## **MONITOR IS NOT WORKING**

Make sure the monitor is connected through the Mini Display/Thunderbolt® port of the MacBook Air® via the LandingZone's Cutout for Thunderbolt® port **(2)**.





# CUSTOMER SUPPORT

## **ONLINE SUPPORT**

Go to [landingzone.net/support](http://landingzone.net/support)

## **PHONE SUPPORT**

Call 888-872-3251 (Monday - Friday, 9:00 a.m - 5:00 pm Pacific Time)

## **EMAIL SUPPORT**

Send email to [support@landingzone.net](mailto:support@landingzone.net)

## PROPER OPERATING ENVIRONMENT

- Operating temperature: 50° to 95° F (10° to 35° C)
- Storage temperature: -13° to 113° F (-24° to 45° C)
- Relative humidity: 0% to 90% noncondensing
- Maximum operating altitude: 10,000 feet
- Maximum storage altitude: 15,000 feet
- Maximum shipping altitude: 35,000 feet

## CARE & CLEANING

Clean with a soft cloth. Do not use water or cleaning solutions to clean LandingZone.

When travelling, use the supplied Travel Clip to keep the lever closed

## DISPOSAL

Applicable laws may limit how you can dispose of this product. Accordingly, please make sure you follow your local, state, federal, and country ordinances, laws, regulations, or other guidelines to properly dispose of this product and the accompanying packaging materials.

## COPYRIGHT & TRADEMARK INFORMATION

© 2012 InfiniWing, Inc.

LandingZone is a registered trademark of InfiniWing, Inc.

Apple, the Apple logo, MacBook Air®, Mac OS X, Snow Leopard, Lion, and Mountain Lion are trademarks of Apple, Inc., registered in the U.S. and other countries.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license by Apple, Inc.

Kensington is a registered trademark by Kensington Computer Group, a division of ACCO Brands.

All other company and product names mentioned may be trademarks of their respective companies. Mention of third-party products is for informational purposes only and does not constitute an endorsement or recommendation. InfiniWing assumes no responsibility with regard to the performance of products mentioned.



For additional languages, visit [LandingZone.net/languages](https://LandingZone.net/languages)